

STANDARD

Guardrails

evo GCE-PLI


Evo inclined free-standing guardrail: GCE-PLI

The **SECURILISSE® evo GCE-PLI** guardrail makes it possible to secure roofs inaccessible to the public without perforating the waterproofing or dismantling the cover.

The simplified design of the base delivered welded to the upright and the assembly by 4 identical self-tapping screws per upright make this product economical and quick to install.

Material: Aluminium
Weight: 20 kg per linear metre
Fixing: 4 self-tapping screws sink-plated
Finish: Raw

Technique: Delivered with manuals and drawings available online at:
<http://extranet.somain.fr>

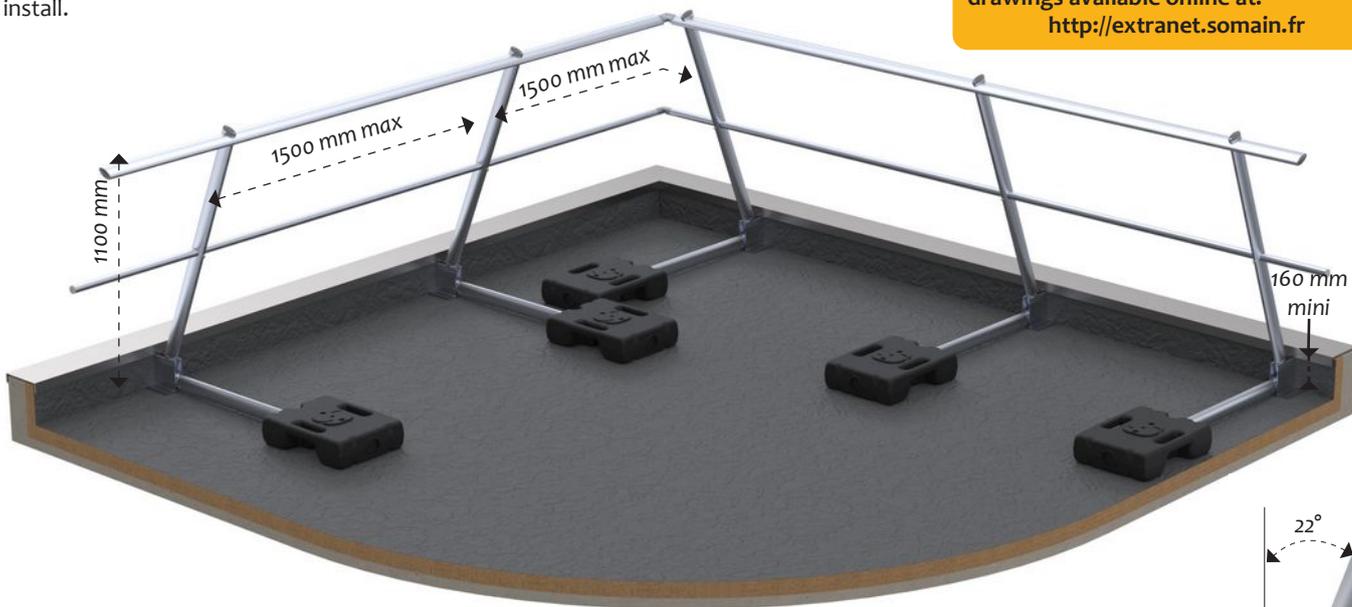

REF: 101925

Inclined upright with welded base.



Free-standing foldable guardrail : GC-PLR

The **SECURILISSE® autoportant rabattable** combines all the advantages of the **SECURILISSE® autoportant**. It meets the most stringent aesthetic requirements thanks to its foldable frame system. Its stability is ensured by ballast weights covered with HDPE to protect building waterproofing.

Factory assembly
No maintenance
Quick installation



REF: 007100


Free-standing, 4,5 ml foldable Guardrail. Delivered with 3 25kg ballast weights covered with HDPE.



REF: 100883

Angle kit for free-standing, foldable Guardrail.

Space requirement:

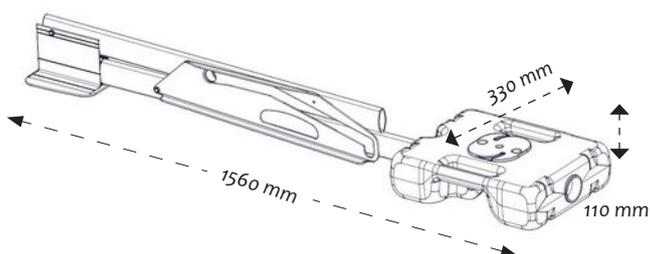

Adhesive stopper



REF: 101289

Adhesive stopper. To be used when there is no parapet.

Toeboard support



REF: 101445

Toeboard fixation for GCE-PL. To be used when there is a parapet of less than 100 mm.